

The new 2013 Industrial Rack range is the perfect choice for professional users of lighting, sound, video, telemetry and telecoms equipment. Available from 4u to 20u (in 2u increments), this size range should find uses in most applications and industry sectors.



All manufactured in our well equipped UK factory.




- ★ 9mm birch ply construction with HPL exterior
- ★ Select from a range of eight HPL colours
- ★ Standard 550mm equipment depth with 62mm (int.) removable doors
- ★ Front AND Rear, punched steel rack-strip
- ★ Butterfly catches and recessed handles as standard
- ★ Penn-Elcom hardware.


4" castors (2 braked, 2 un-braked) fitted to plywood plinth.
As above but fitted to plywood runners and includes an additional four handles ('crossed' configuration).
M6 Rack-nuts, bolts and washers *INCLUDED!*




555 RACKS - TECHNICAL



4u



6u



8u



10u



12u



14u





16u



18u





20u

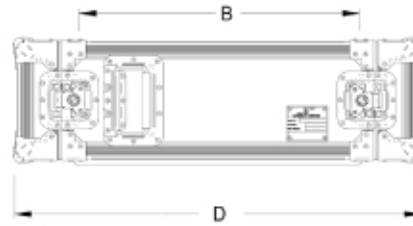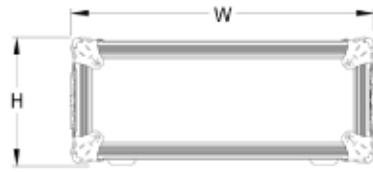

Rack without castors

Size	H
4u	222
6u	311
8u	400
10u	489
12u	578
14u	667
16u	756
18u	845
20u	934

4u version shown

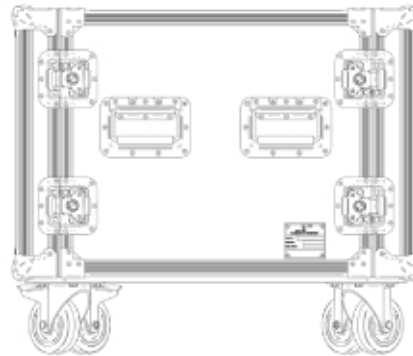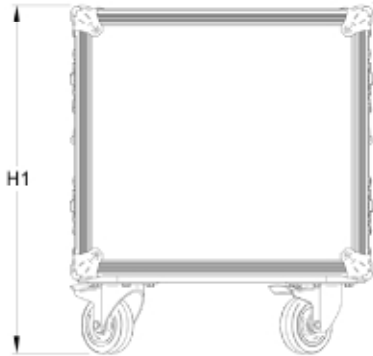


Rack with castors to base

10u version shown

Size	H1
8u	545
10u	634
12u	723
14u	812
16u	901
18u	990
20u	1079

Rack with castors to rear door

12u version shown

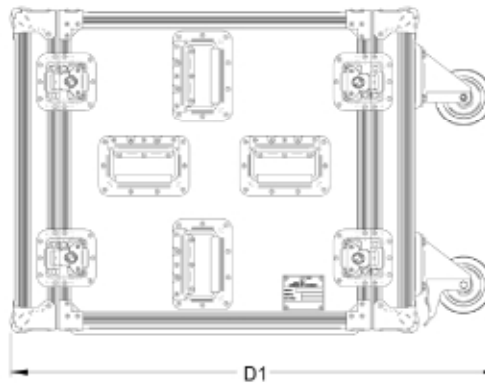

Size	H
12u	578
14u	667
16u	756
18u	845
20u	934

W - Overall external width.....536mm
 B - Pitch between rack faces...510mm
 (Common to all racks of this part number)
 D - 710mm
 D1 - 855mm
 H - Overall external height, including skids
 H1 - Overall external height, including castors
 Doors - Internal depth 62mm
 Body - Overall depth 550mm

Punched steel rackstrip fitted to front and rear as standard.

1u = 44.45mm or 1.75"



14u showing castors fitted to base



18u showing castors fitted to rear door and 'crossed' handle layout

